

Product Datasheet model uvex i-lite CB 9143 970

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- large, flat lens delivers unrestricted field of vision
- x-tended sideshield offers additional protection from hazards
- side arms with multi-incline points allow for a high level of individualization to ensure a good fit for all facial shapes and head widths
- ergonomically shaped side arms provide a secure fit without pressure
- nose bridge designed for all-day comfort
- CB (custom bridge) version for perfect Asian fit
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- metal-free

2. Technical Details Body

Temple

Material	PC-PBT
Features	Side arms with multi-incline points
Colour	anthracite, blue

Marking

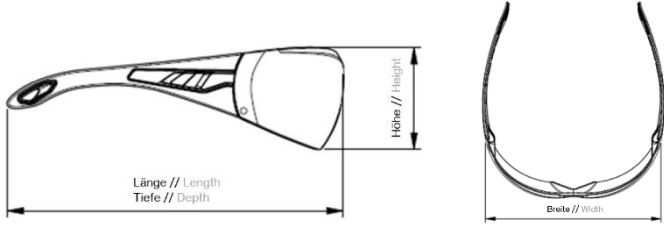


Manufacturer 's ID code	W
Applicable EN ISO norm	16321
Impact resistance	C (45 m/s)
Tested under extreme temperatures	T
High-mass impact	HM
Tested under extreme temperatures	T
Test head size	2-M
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.35 mm at PD
Coating	uvex supravision extreme
Colour	clear
UV protection	UV400
Version	“asian fit” acc. to test head 2-M, EN ISO 16321
Marking	
Manufacturer 's ID code	W
Filter	UL
Tinting level	1.2
Impact resistance	C (45 m/s)
Tested under extreme temperatures	T
High-mass impact	HM
Tested under extreme temperatures	T
Optical class	1
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	
Tested acc. to JIS	 JQA

4. Logistical Information

Product

Weight	35g		
Dimensions (L x W x B) in approx. mm	 picture only for reference		
	160 x 150 x 55		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4066853060635	4066853060642	4066853060659
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm	 picture only for reference		
	60 x 150 x 70	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	35	350	5,600
Gross weight in approx. g	43	535	9,430
Country of Origin	Germany		

5. Miscellaneous

Standards	EN ISO 16321-1
PPE Category	Category II